

SHIVA AMVAJ STAIRWAY TIMER

SHIVA AMVAJ STAIRWAY TIMER



This device works in two different modes :

AUTO :

Set your desired time from 1 to 10 minutes. Then put the button placed on device to A mode and connect input electricity. By pressing each of switches, lamps get turned on and after passing time they get adjusted and turned off.

MANUAL : when you want lamps to remain turned on, put the rocker switch placed on device to M mode. Now by pressing one of switches, lamps get turned on permanently. To make lamps get turned on, it is necessary to return rocker switch to A mode to make lamps get turned off after time passing.

1

5

SHIVA Amvaj

SHIVA Amvaj

Introduction

Shivaamvaj Stairway Timer facilitates controlling lighting of stairway, parkings, yards and small storage spaces and generally places that don't need permanent lighting in order to save energy.

Features

- Save energy and increase lamps' useful life
- Accuracy at time repeating
- 2 indicators to announce AC: grid's electricity
REL: relay status
- Equipped with Manual(M) and automatic(A) rocker switch
Time adjustment screw

NOTE : If the rocker switch is in M position and lamps relighted and input electricity keeps connecting and disconnecting, by pressing one of switches, lamps get turned on .

Note: use the contactor with high-ampere for excessive loads of maximum allowed load table .

maximum allowed load table				
Halogen 50W 20 ones	Low consumption 20W 8 ones	Fluorescente 80W 30 ones	3500 W	3500 W

2

6

SHIVA Amvaj

SHIVA Amvaj

- Capability to
 - Mounting unlimited push button switches
 - Closeable device panel
 - Easily mounted on the rail and other surfaces
- Small size

Technical specifications

- Supply voltage : 180-250VAC/50-60HZ
- Off delay : 1-10 min
- operating condition
 - Temperature : -20 C ... +65C
 - Humidity : 70%
- power consumption : $\approx$ 0 VA
- Output : 16A relay

3 year GUARANTEE

Respecting the customer is our duty

3 year no question asked guarantee under these condition:

- 1-at most it should be within 3 years from the date printed on the label of the product
- 2-the label on the product should be safe and sound

3


7

SHIVA Amvaj

SHIVA Amvaj

Installation Instruction

Install the timer inside panel on the rail. Then wire based on schematic.

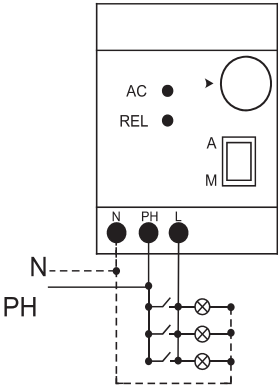

Shiva Amvaj products in accordance with international standards and with a 3 year no question asked guarantee are presented



customersupport: (+98)3135723690-1
sale: (+98)3135723444-5 fax: (+98)3135723400
Email: info@shivaamvaj.com
ShivaAmvaj Company is also presenting services in cyberspace
ShivaAmvaj number: 00989134034351